

# EZSwitch<sup>™</sup> 10/100

## 5/8-Port 10BASE-T/100BASE-TX Switch

- 10/100 Mbps auto-negotiation ports
- IEEE 802.3 and 802.3u compliance ensures compatibility with standards-based hubs, switches and cards from any vendor
- Auto-MDI/MDIX on all ports
- Plug and play - nothing to configure
- Perfect for small and medium sized workgroups
- Desktop installation

## User Guide

SMC - EZ6505TX  
SMC - EZ6508TX







# **EZ Switch 10/100**

## **User Guide**

---

From SMC's EZ line of low-cost workgroup LAN solutions



38 Tesla  
Irvine, CA 92618  
Phone: (949) 679-8000

Dec. 2002  
Pub. # 150000021000B R01

## Copyright

Information furnished by SMC Networks, Inc. (SMC) is believed to be accurate and reliable. However, no responsibility is assumed by SMC for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SMC. SMC reserves the right to change specifications at any time without notice.

Copyright © 2002 by  
38 Tesla

Irvine, CA 92618

All rights reserved. Printed in China

### **Trademarks:**

SMC is a registered trademark; and EZ Hub is a trademark of SMC Networks, Inc. Other product and company names are trademarks or registered trademarks of their respective holders.

## Limited Warranty

**Limited Warranty Statement:** SMC Networks, Inc. ("SMC") warrants its products to be free from defects in workmanship and materials, under normal use and service, for the applicable warranty term. All SMC products carry a standard 90-day limited warranty from the date of purchase from SMC or its Authorized Reseller. SMC may, at its own discretion, repair or replace any product not operating as warranted with a similar or functionally equivalent product, during the applicable warranty term. SMC will endeavor to repair or replace any product returned under warranty within 30 days of receipt of the product.

The standard limited warranty can be upgraded to a Limited Lifetime\* warranty by registering new products within 30 days of purchase from SMC or its Authorized Reseller. Registration can be accomplished via the enclosed product registration card or online via the SMC web site. Failure to register will not affect the standard limited warranty. The Limited Lifetime warranty covers a product during the Life of that Product, which is defined as the period of time during which the product is an "Active" SMC product. A product is considered to be "Active" while it is listed on the current SMC price list. As new technologies emerge, older technologies become obsolete and SMC will, at its discretion, replace an older product in its product line with one that incorporates these newer technologies. At that point, the obsolete product is discontinued and is no longer an "Active" SMC product. A list of discontinued products with their respective dates of discontinuance can be found at:

**[http://www.smc.com/index.cfm?action=customer\\_service\\_warranty](http://www.smc.com/index.cfm?action=customer_service_warranty).**

All products that are replaced become the property of SMC. Replacement products may be either new or reconditioned. Any replaced or repaired product carries either a 30-day limited warranty or the remainder of the initial warranty, whichever is longer. SMC is not responsible for any custom software or firmware, configuration information, or memory data of Customer contained in, stored on, or integrated with any products returned to SMC pursuant to any warranty. Products returned to SMC should have any customer-installed accessory or add-on components, such as expansion modules, removed prior to returning the product for replacement. SMC is not responsible for these items if they are returned with the product.

Customers must contact SMC for a Return Material Authorization number prior to returning any product to SMC. Proof of purchase may be required. Any product returned to SMC without a valid Return Material Authorization (RMA) number clearly marked on the outside of the package will be returned to customer at customer's expense. For warranty claims within North America, please call our toll-free customer support number at (800) 762-4968. Customers are responsible for all shipping charges from their facility to SMC. SMC is responsible for return shipping charges from SMC to customer.

## LIMITED WARRANTY

**WARRANTIES EXCLUSIVE:** IF AN SMC PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, CUSTOMER'S SOLE REMEDY SHALL BE REPAIR OR REPLACEMENT OF THE PRODUCT IN QUESTION, AT SMC'S OPTION. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SMC NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE OR USE OF ITS PRODUCTS. SMC SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

**LIMITATION OF LIABILITY:** IN NO EVENT, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), SHALL SMC BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE, LOSS OF BUSINESS, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF ITS PRODUCTS, EVEN IF SMC OR ITS AUTHORIZED RESELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

SOME STATES DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES OR THE LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR CONSUMER PRODUCTS, SO THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE. NOTHING IN THIS WARRANTY SHALL BE TAKEN TO AFFECT YOUR STATUTORY RIGHTS.

\* SMC will provide warranty service for one year following discontinuance from the active SMC price list. Under the limited lifetime warranty, internal and external power supplies, fans, and cables are covered by a standard one-year warranty from date of purchase.

SMC Networks, Inc.  
38 Tesla  
Irvine, CA 92618

# COMPLIANCES

## FCC - Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with instructions, may cause harmful interference to radio communications. However, there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

## EC Conformance Declaration - Class B

SMC contact for these products in Europe is:

SMC Networks Europe,  
Edificio Conata II,  
Calle Frutuós Gelabert 6-8, 2<sup>a</sup>, 4<sup>a</sup>,  
08970 - Sant Joan Despí,  
Barcelona, Spain.

This information technology equipment complies with the requirements of the Council Directive 89/336/EEC on the Approximation of the laws of the Member States relating to Electromagnetic Compatibility and 73/23/EEC for electrical equipment used within certain voltage limits and the Amendment Directive 93/68/EEC. For the evaluation of the compliance with these Directives, the following standards were applied:

|           |   |
|-----------|---|
| RFI       | * Limit class B according to EN 55022:1998  |
| Emission: | * Limit class A for harmonic current emission according to EN 61000-3-2/1995  |
|           | * Limitation of voltage fluctuation and flicker in low-voltage supply system according to EN 61000-3-3/1995                       |
| Immunity: | * Product family standard according to EN 55024:1998  |
|           | * Electrostatic Discharge according to EN 61000-4-2:1995 (Contact Discharge: $\pm 4$ kV, Air Discharge: $\pm 8$ kV)               |
|           | * Radio-frequency electromagnetic field according to EN 61000-4-3: 1996 (80 - 1000MHz with 1kHz AM 80% Modulation: 3V/m)          |
|           | * Electrical fast transient/burst according to EN 61000-4-4:1995(AC/DC power supply: $\pm 1$ kV, Data/Signal lines: $\pm 0.5$ kV) |
|           | * Surge immunity test according to EN 61000-4-5:1995(AC/DC Line to Line: $\pm 1$ kV, AC/DC Line to Earth: $\pm 2$ kV )            |

## COMPLIANCES

- \* Immunity to conducted disturbances, Induced by radio-frequency fields: EN 61000-4-6:1996(0.15 - 80MHz with 1kHz AM 80% Modulation: 3V/m)
  - \* Power frequency magnetic field immunity test according to EN 61000-4-8:1993(1A/m at frequency 50Hz)
  - \* Voltage dips, short interruptions and voltage variations immunity test according to EN 61000-4-11:1994(>95% Reduction @10ms, 30% Reduction @500ms, >95% Reduction @5000ms)
- LVD:       \* EN60950(A1/1992; A2/1993; A3/1993; A4/1995; A11/1997)

### Industry Canada - Class B

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus as set out in the interference-causing equipment standard entitled "Digital Apparatus," ICES-003 of the Department of Communications.

Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de Classe B prescrites dans la norme sur le matériel brouilleur: "Appareils Numériques," NMB-003 édictée par le ministère des Communications.



# Table of Contents

|                                 |           |
|---------------------------------|-----------|
| <b>1. INTRODUCTION</b>          | <b>1</b>  |
| Description of Hardware         | 1         |
| Features and Benefits           | 1         |
| Front Panel LEDs                | 2         |
| Rear Panel                      | 3         |
| <b>2. INSTALLING THE SWITCH</b> | <b>4</b>  |
| Equipment Checklist             | 4         |
| Selecting a Site                | 4         |
| Instructions                    | 5         |
| <b>3. SAMPLE APPLICATIONS</b>   | <b>6</b>  |
| <b>4. TROUBLESHOOTING</b>       | <b>8</b>  |
| <b>5. CABLE SPECIFICATIONS</b>  | <b>9</b>  |
| Cable Type and Connector        | 9         |
| RJ-45 Connector Pin Assignments | 9         |
| <b>6. SPECIFICATIONS</b>        | <b>11</b> |
| EZ Switch 10/100                | 11        |
| General                         | 11        |
| SMC-EZ6505TX                    | 12        |
| SMC-EZ6508TX                    | 13        |



# INTRODUCTION

This manual describes how to install and use SMC's EZ Switch 10/100. It features 5,8 10/100 Mbps Auto Negotiation switch ports, and provides the flexibility to fit into your working space with network environment. The EZ Switch 10/100 can be used to connect with PCs, servers, hubs, bridges, other switches and routers. It can also act as a bridge between 10Mbps and 100Mbps networks segments.

This EZ Switch supports 10Mbps and 100Mbps dedicated bandwidths in each port. The Switch is built with plug & play, auto-negotiation on all ports, store-and-forward transmission scheme, IEEE802.3x flow control and back pressure operation for easy installation and smooth transition from legacy 10Mbps to 100Mbps Ethernet networks. All ports support MDI/MDI-X to facilitate your network expansion.

## Description of Hardware

The EZ Switch™ 10/100, SMC-EZ6505TX, and SMC-EZ6508TX, are 5/8-port Fast Ethernet switch featuring 5/8 10BASE-T/100BASE-TX auto-negotiation ports. These switches provide an ideal bridge between 10 Mbps and 100 Mbps Ethernet networks.

## Features and Benefits

- IEEE 802.3 and 802.3u compliance ensures compatibility with standards-based hubs, switches and cards from any vendor
- 5/8 dual-speed 10/100 Mbps auto-negotiation ports
- Plug and play—nothing to configure
- Built-in wiring crossovers on all ports allow



connections to servers and workstations to be made with straight-through cabling

- “At-a-glance” LEDs for port and system status monitoring
- Jabber lock-up function automatically stops transmission of abnormal frames to prevent network disruption
- Automatic polarity detection and correction
- Desktop installation

## Front Panel LEDs

The front panel of the switch provides status LEDs for “at-a-glance” system monitoring. The following table details the functions of the various indicators:

| Port and Switch Status LEDs |                |   |
|-----------------------------|----------------|---|
| LEDs                        | Condition      | Status  |
| Power                       | Green          | Hub is receiving power.   |
| Link/<br>Activity           | Green          | Indicates a valid network connection between the port and the attached device.        |
|                             | Off            | Indicates no network connection established between the port and the attached device. |
|                             | Flashing Green | Indicates that the port is transmitting or receiving data.                            |

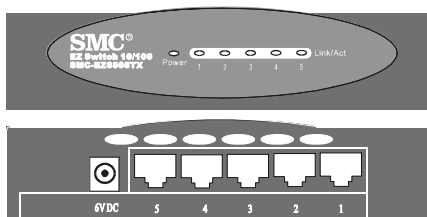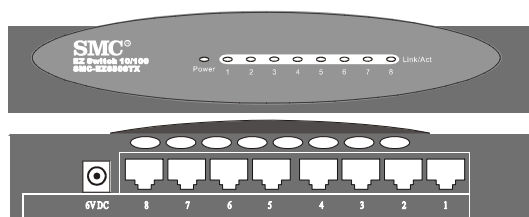**SMC-EZ6505TX****SMC-EZ6508TX****Rear Panel**

These EZ Switch 10/100 models feature 5/8 10BASE-T/100BASE-TX ports with RJ-45 connectors located on the rear panel of the Switch. Each port contains a built-in wiring crossover (MDI-X) that allows for the use of straight-through twisted-pair cable for connections to devices without built-in crossover ports (i.e., workstations, printers, etc.).

The DC power receptacle is also located on the rear panel of the hub.

# INSTALLING THE SWITCH

The EZ Switch 10/100 can be placed on a desktop or shelf and stacked with other devices using the provided 4 rubber foot pads

## Equipment Checklist

After unpacking the EZ Switch 10/100, check the contents of the box to be sure you've received the following components:

- EZ Switch 10/100 SMC-EZ6505TX or SMC-EZ6508TX
- Appropriate DC power adapter
- Four rubber foot pads
- SMC Warranty Registration Card
- This User Guide

## Selecting a Site

Be sure to follow the site selection guidelines below when choosing a location:

- Select a suitable location for the switch:
  - It should be accessible for installing, cabling and maintaining the switch.
  - The temperature and humidity should be within the ranges listed in the specifications.
  - The status LEDs should be clearly visible.

- There should be adequate space (approximately two inches) on all sides for proper air flow.
- Make sure twisted-pair cable is always routed away from power lines, fluorescent lighting fixtures and other sources of electrical interference such as radios, transmitters, etc.
- Make sure that a properly grounded power outlet is within 8 feet (2.44 meters) of the hub and is powered from an independent circuit breaker. As with any equipment, using a filter or surge suppressor is recommended.

## Instructions



1. **Positioning the Switch:** For desktop or shelf mounting, attach the four adhesive foot pads to the bottom of the switch.
2. **Applying Power:** Plug one end of the power adapter into the socket on the switch's rear panel, and the other end into an appropriate electrical outlet. Check the Power LED to be sure power is on.

**Note:** It is not necessary to power off the switch before connecting or disconnecting any UTP cables, as these actions *will not* disrupt the operation of other devices attached to the switch.

3. **Connecting PCs:** Connect each PC to an RJ-45 port on the switch using a straight-through twisted-pair cable segment, maximum 100 meters (328 ft.). The EZ Switch 10/100 will support up to 5/8 PCs.
4. **Cascading Switch and Other Network Devices:** Prepare straight-through Category 5 twisted-pair cable with RJ-45 plugs. Make sure the cable does not exceed 100 meters (328 feet). Connect one end of the cable to the switch's port, and connect the other end of the cable to an MDI/MDI-X RJ-45 port on the other device.


# SAMPLE APPLICATIONS

Some typical applications for the EZ Hub 10/100, SMC-EZ6505TX and SMC-EZ6508TX are illustrated below:

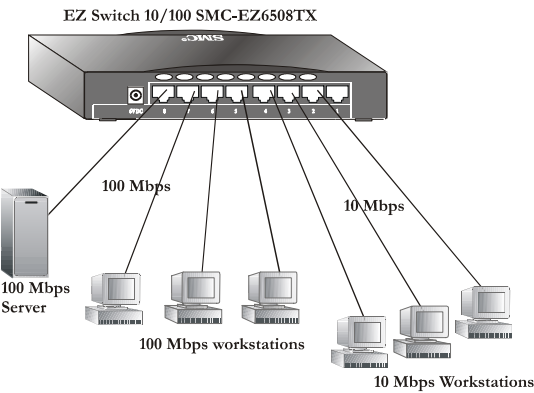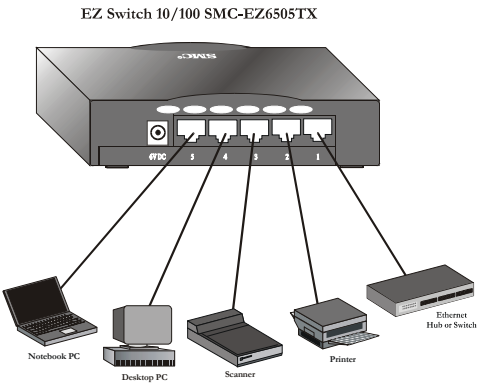

## Standalone Switch



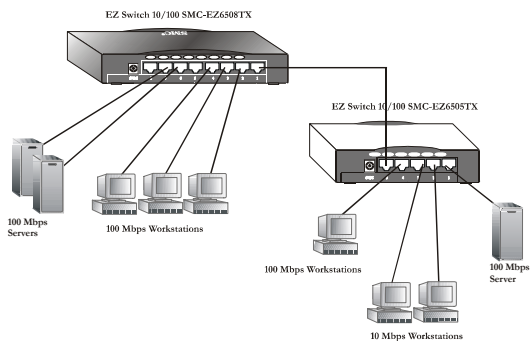

## Cascading Switches

# TROUBLESHOOTING

## 1. Symptom

Power LED does not light after power on.

### Probable Causes

Power outlet or power cord may be defective.

### Possible Solutions

- Check for loose connections.
- Check the power outlet by using it for another device.
- Replace the power cord.

## 2. Symptom

Link LED does not light after connection is made.

### Probable Causes

Switch port, network card or cable may be defective.

### Possible Solutions

- Check that the Switch and attached device are both powered on.
- Be sure the network cable is connected to both devices.
- Verify that Category 5 cable is used for 100 Mbps connections and that the length of any cable does not exceed 100 meters (328 feet).
- Check the network card and cable connections for defects.
- Replace the defective card or cable if necessary.

# CABLE SPECIFICATIONS

## Cable Type and Connector

| 10BASE-T Cable       |                |           |
|----------------------|----------------|-----------|
| Type                 | Length         | Connector |
| Category 3, 4, 5 UTP | 100 m (328 ft) | RJ-45     |


| 100BASE-TX Cable |                |           |
|------------------|----------------|-----------|
| Type             | Length         | Connector |
| Category 5 UTP   | 100 m (328 ft) | RJ-45     |

## RJ-45 Connector Pin Assignments

**Caution:** **DO-NOT** plug a phone jack connector into any RJ-45 port. Use only twisted-pair cables with RJ-45 connectors that conform with FCC standards.

An Ethernet or Fast Ethernet twisted-pair link segment requires two pairs of wires. Each wire pair is identified by two different colors. For example, one wire might be green and the other, green with a white stripe.

Each wire pair must be attached to the RJ-45 connector in a specific orientation as detailed below.

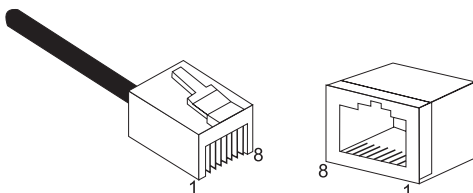

## CABLE SPECIFICATIONS

| RJ-45 Pin Assignments<br>Straight-Through Cable |         |
|---|---------|
| End 1   | End 2   |
| 1 (Tx+)   | 1 (Tx+) |
| 2 (Tx-)   | 2 (Tx-) |
| 3 (Rx+)   | 3 (Rx+) |
| 6 (Rx-)   | 6 (Rx-) |

| RJ-45 Pin Assignments Crossover Cable |         |
|---------------------------------------|---------|
| End 1                                 | End 2   |
| 1 (Tx+)                               | 3 (Rx+) |
| 2 (Tx-)                               | 6 (Rx-) |
| 3 (Rx+)                               | 1 (Tx+) |
| 6 (Rx-)                               | 2 (Tx-) |

**Note:** The “+” and “-” signs are used to represent the polarity of the wires that make up each wire pair.

# SPECIFICATIONS

## **EZ Switch 10/100**

### **General**

#### **Network Interface**

RJ-45: 100 ohm, UTP cable

10BASE-T - Categories 3, 4, or 5

100BASE-TX - Category 5

#### **LEDs**

Power - one

Link/Activity - one per port(

#### **Filtering/Forwarding/Learning Rates**

Full line rate

#### **Temperature**

Operating: 32° to 122°F (0° to 50°C)

Storage: -40° to 158°F (-40° to 70°C)

#### **Humidity, noncondensing**

5% to 95%

#### **Standards**

IEEE 802.3, 802.3u, ISO/IEC 8802-3

## *SPECIFICATIONS*

### **EMC/Safety Compliances**

CE Mark

Emissions

FCC Class B, EN 55022 (CISPR 22) Class B

C-Tick - AS/NZS 3548 (1995) Class B

EN 61000-3-2/3

Immunity

IEC 1000-4-2/3/4/6

Safety

CSA/NRTL (C22.2.950, UL 1950)

TÜV/GS (EN60950)

CB (IEC60950)

### **Warranty**

Limited Lifetime

## **SMC-EZ6505TX**

### **Ports**

5 RJ-45 ports

Ports 1-5: Twisted-pair, fixed crossover

### **MAC Address Table**

2K entries

### **Memory Buffer**

768 K bits per unit

### **Size**

5.15 x 3.384 x 1.26 in. (13.1 x 8.5 x 3.2 cm)

### **Weight**

0.794 lbs (0.36 kg)

### **Power Requirements**

DC input

6V, 1A

### **Power Consumption**

4.6 Watts

### **Heat Dissipation**

15.7 BTU/hr

### **Maximum Current**

0.76A @ 6VDC

## **SMC-EZ6508TX**

### **Ports**

8 RJ-45 ports

Ports 1-8: Twisted-pair, fixed crossover

### **MAC Address Table**

2K entries

### **Memory Buffer**

768 K bits per unit

### **Size**

6.93 x 3.34 x 1.26 in. (17.6 x 8.5 x 3.2 cm)

### **Weight**

0.794 lbs (0.36 kg)

### **Power Requirements**

DC input

6V, 1A

### **Power Consumption**

4.6 Watts

### **Heat Dissipation**

15.7 BTU/hr

### **Maximum Current**

0.76A @ 6VDC

## *SPECIFICATIONS*



#### FOR TECHNICAL SUPPORT, CALL:

From U.S.A. and Canada (24 hours a day, 7 days a week)  
(800) SMC-4-YOU; (949) 679-8000; Fax: (949) 679-1481  
From Europe (8:00 AM - 5:30 PM UK Time)  
44 (0) 118 974 8700; Fax: 44 (0) 118 974 8701

#### INTERNET

E-mail addresses:

[techsupport@smc.com](mailto:techsupport@smc.com)

[european.techsupport@smc-europe.com](mailto:european.techsupport@smc-europe.com)

Driver updates:

[http://www.smc.com/index.cfm?action=tech support drivers downloads](http://www.smc.com/index.cfm?action=tech%20support%20drivers%20downloads)

World Wide Web:

<http://www.smc.com/>

<http://www.smc-europe.com/>

#### FOR LITERATURE OR ADVERTISING RESPONSE, CALL:

|                      |                      |                         |
|----------------------|----------------------|-------------------------|
| U.S.A. and Canada:   | (800) SMC-4-YOU;     | Fax (949) 679-1481      |
| Spain:               | 34-93-477-4935;      | Fax 34-93-477-3774      |
| UK:                  | 44 (0) 118 974 8700; | Fax 44 (0) 118 974 8701 |
| France :             | 33 (0) 41 38 32 32;  | Fax 33 (0) 41 38 01 58  |
| Italy :              | 39 02 739 12 33;     | Fax 39 02 739 14 17     |
| Benelux:             | 31 33 455 72 88;     | Fax 31 33 455 73 30     |
| Central Europe:      | 49 (0) 89 92861-0;   | Fax 49 (0) 89 92861-230 |
| Switzerland:         | 41 (0) 1 9409971;    | Fax 41 (0) 1 9409972    |
| Nordic:              | 46 (0) 868 70700;    | Fax 46 (0) 887 62 62    |
| Northern Europe:     | 44 (0) 118 974 8700; | Fax 44 (0) 118 974 8701 |
| Eastern Europe:      | 34 -93-477-4920;     | Fax 34 93 477 3774      |
| Sub Saharian Africa: | 27-11 314 1133;      | Fax 27-11 314 9133      |
| North Africa:        | 34 93 477 4920;      | Fax 34 93 477 3774      |
| Russia:              | 7 (095) 290 29 96;   | Fax 7 (095) 290 29 96   |
| PRC:                 | 86-10-6235-4958;     | Fax 86-10-6235-4962     |
| Taiwan:              | 886-2-2659-9669;     | Fax 886-2-2659-9666     |
| Asia Pacific:        | (65) 238 6556;       | Fax (65) 238 6466       |
| Korea:               | 82-2-553-0860;       | Fax 82-2-553-7202       |
| Japan:               | 81-45-224-2332;      | Fax 81-45-224-2331      |
| Australia:           | 61-2-8875-7887;      | Fax 61-2-8875-7777      |
| India:               | 91-22-8204437;       | Fax 91-22-8204443       |

If you are looking for further contact information, please visit [www.smc.com](http://www.smc.com) or [www.smc-europe.com](http://www.smc-europe.com).

**SMC**<sup>®</sup>  
N e t w o r k s

38 Tesla  
Irvine, CA 92618  
Phone: (949) 679-8000

Model Numbers:  
SMC-EZ6505TX, SMC-EZ6508TX  
Publication Number:150000021000B R01

**SMC**®  
Networks

38 Tesla  
Irvine, CA 92618  
Phone: (949)679-8000

Model Numbers:  
SMC-EZ6505TX, SMC-EZ6508TX  
Publication Number: 150000021000B R01